

100

FIG. 1

2/12

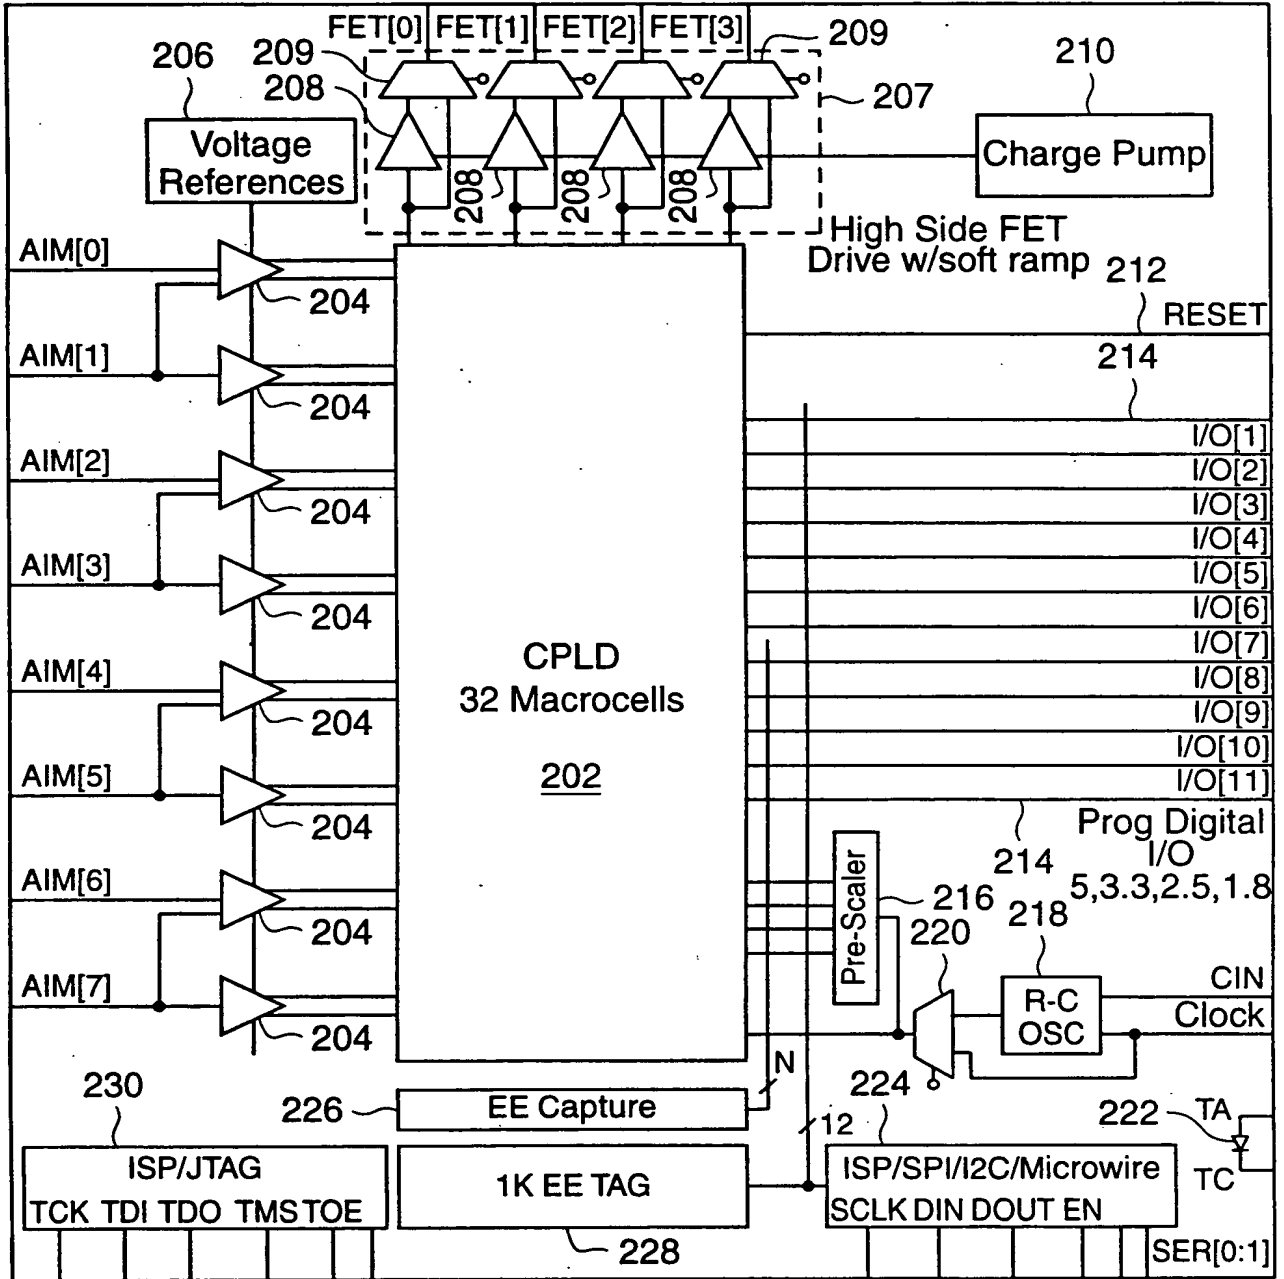


FIG. 2

3/12

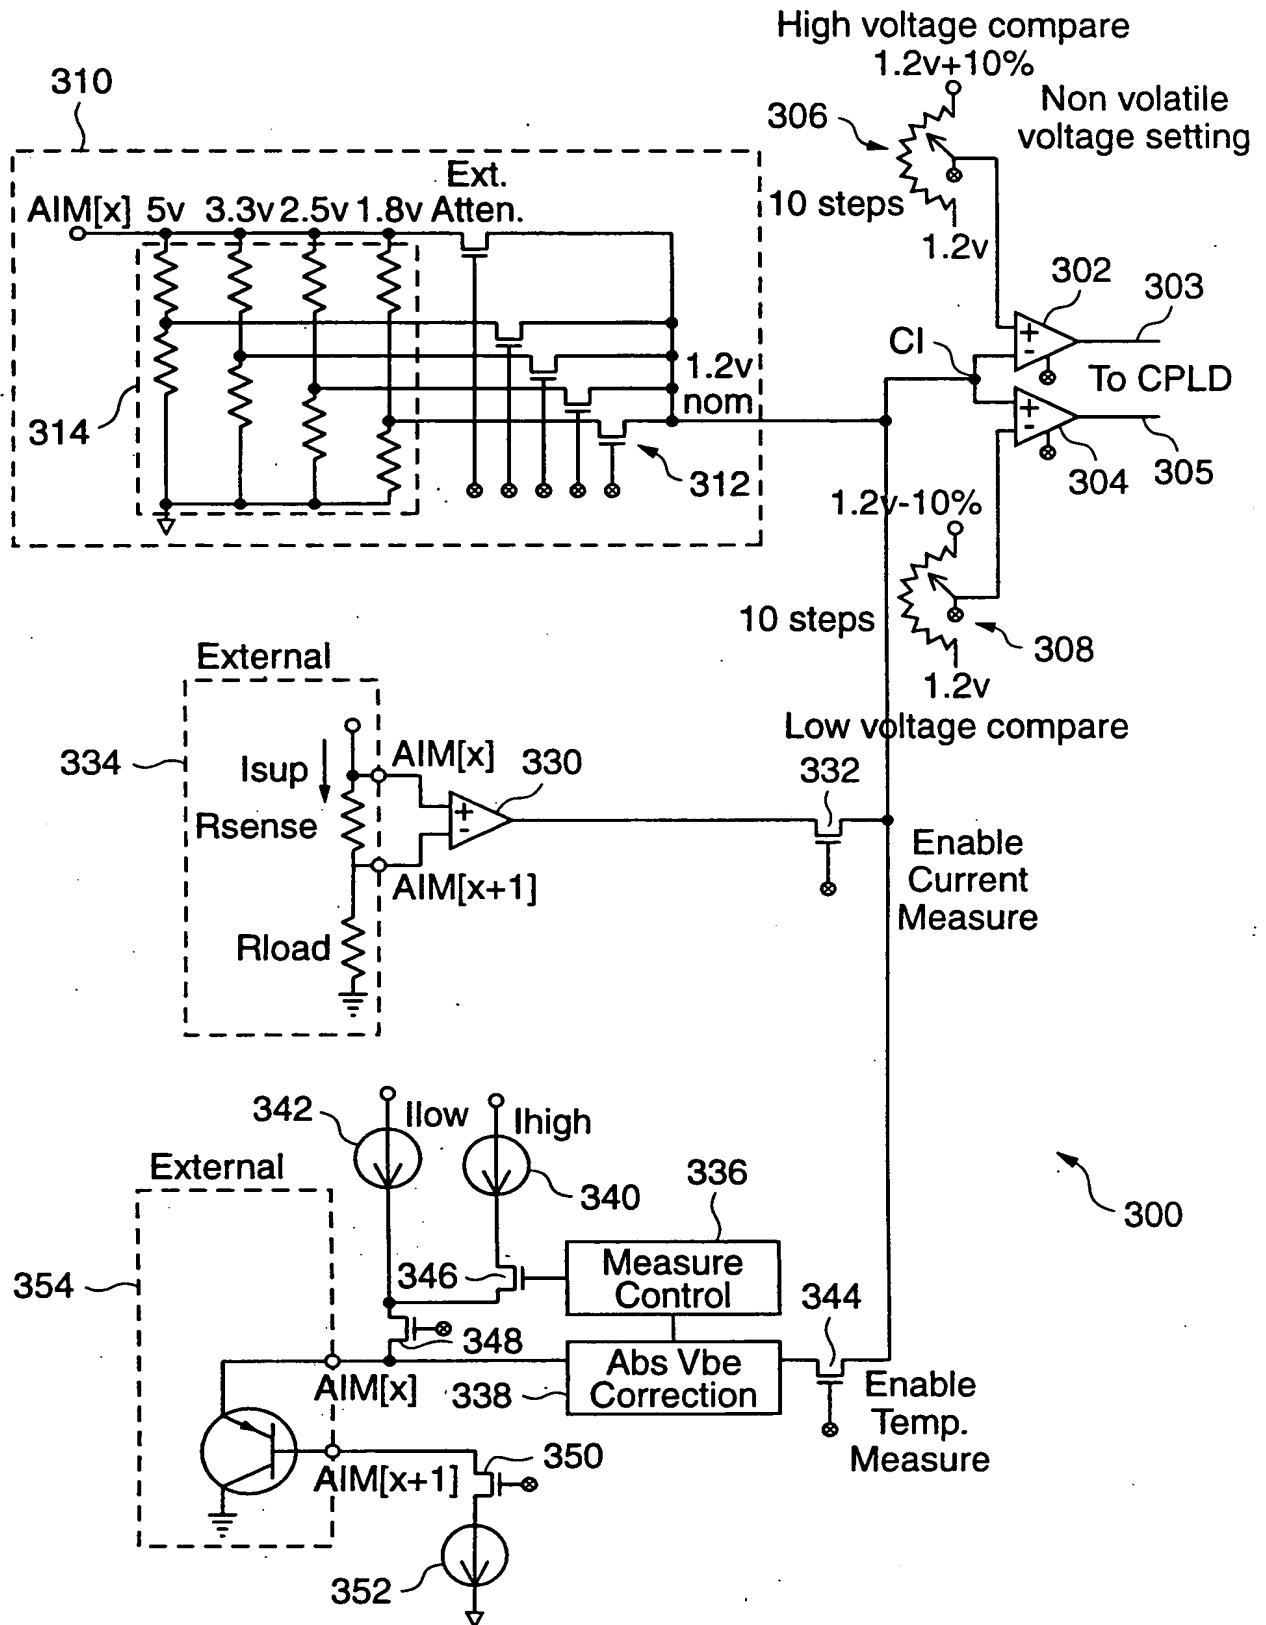


FIG. 3

4/12

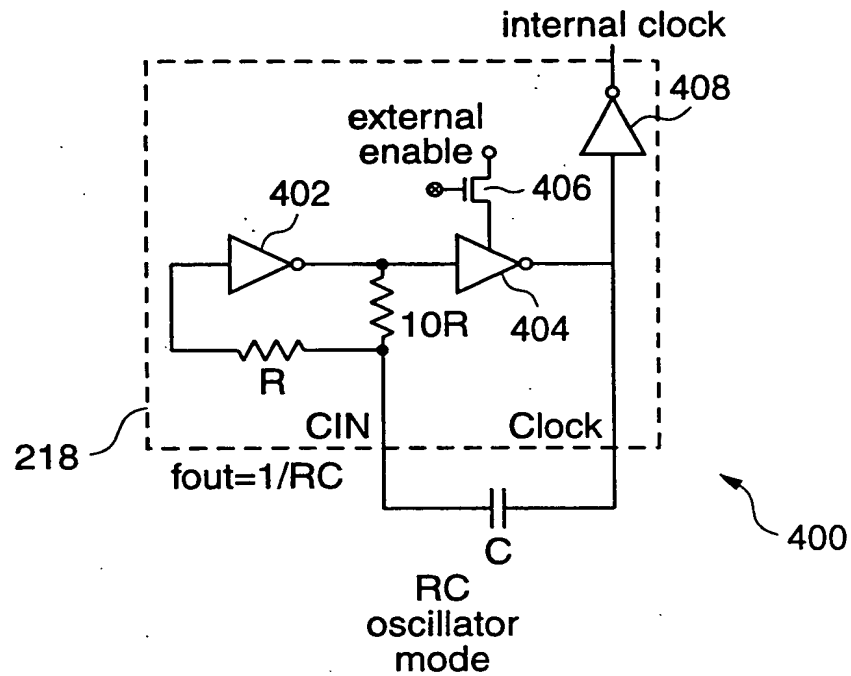


FIG. 4

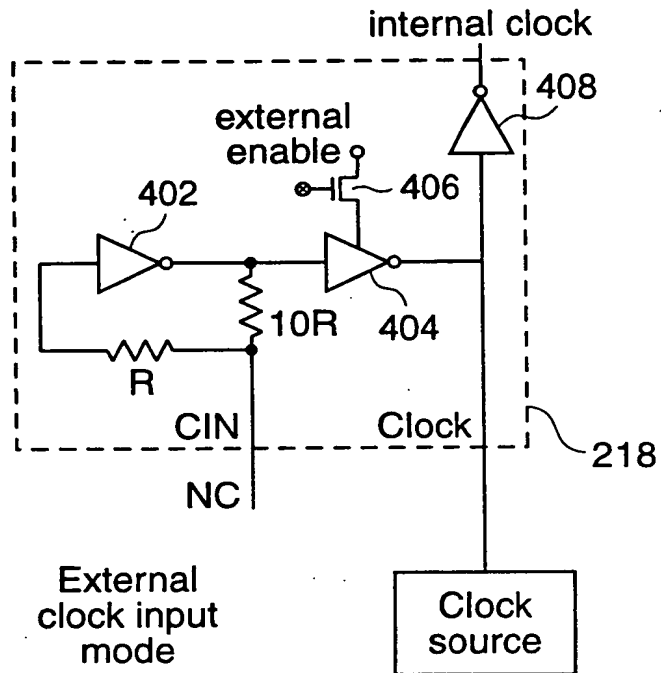


FIG. 5

6/12

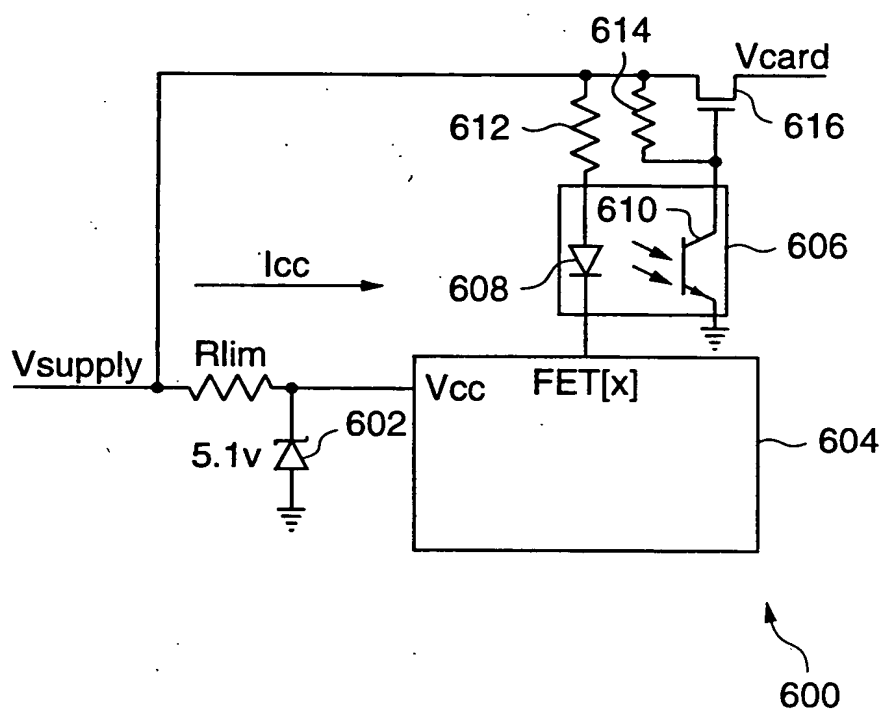


FIG. 6

7/12


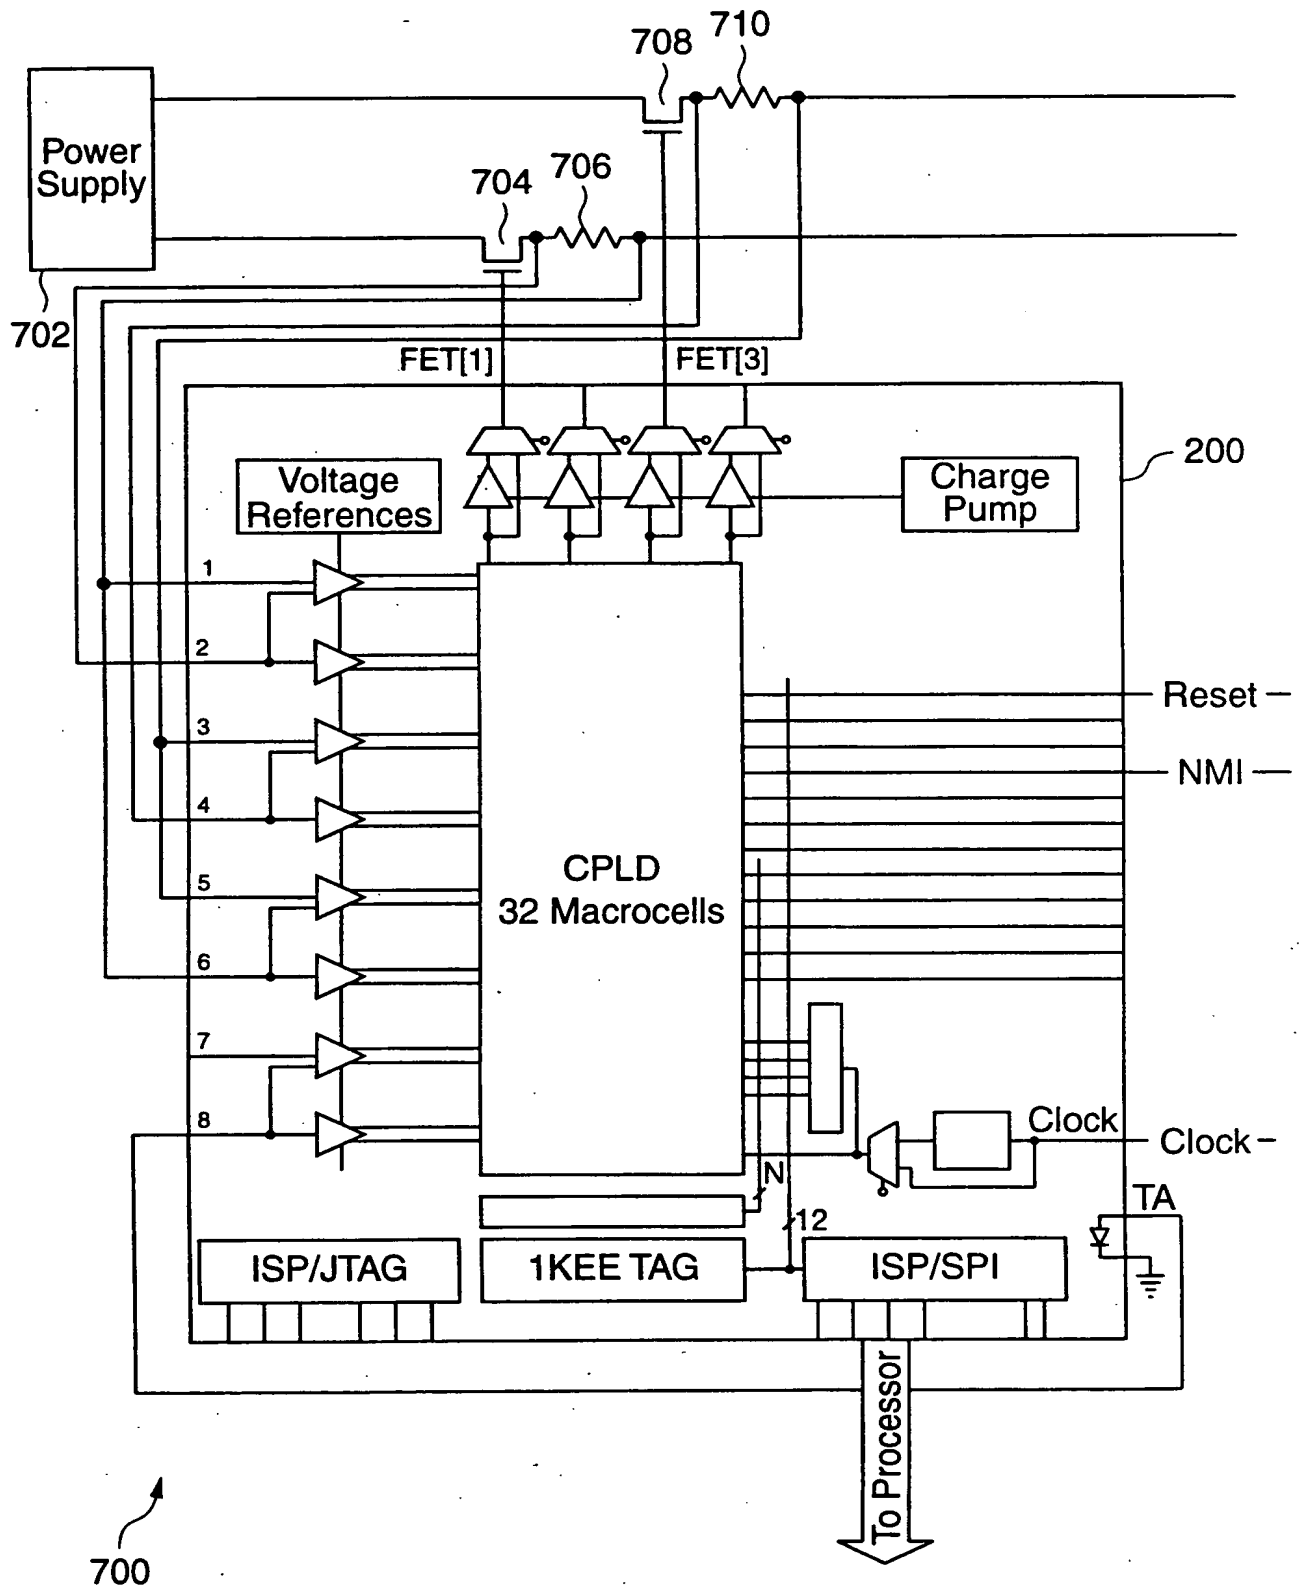


FIG. 7


8/12

FIG. 8

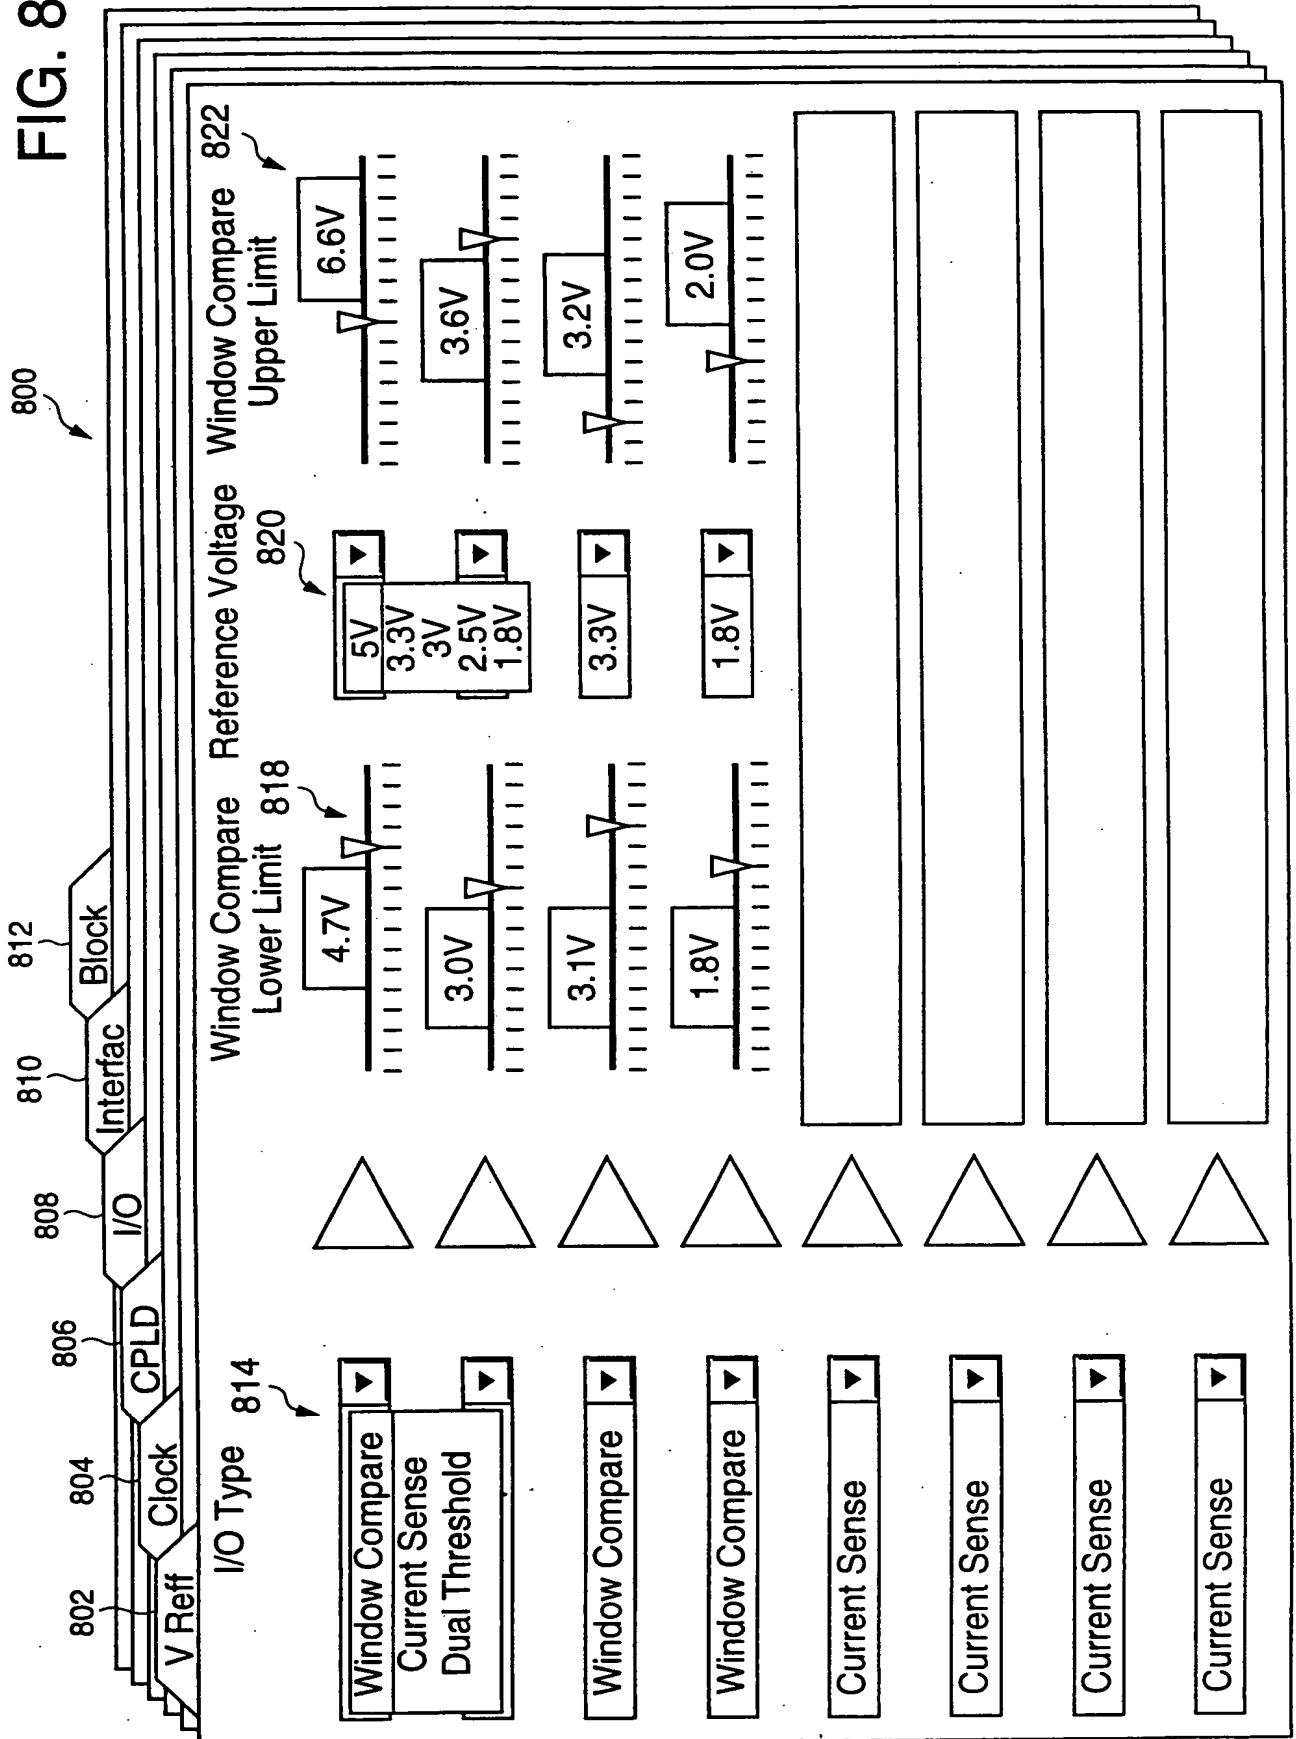


9/12

FIG. 9

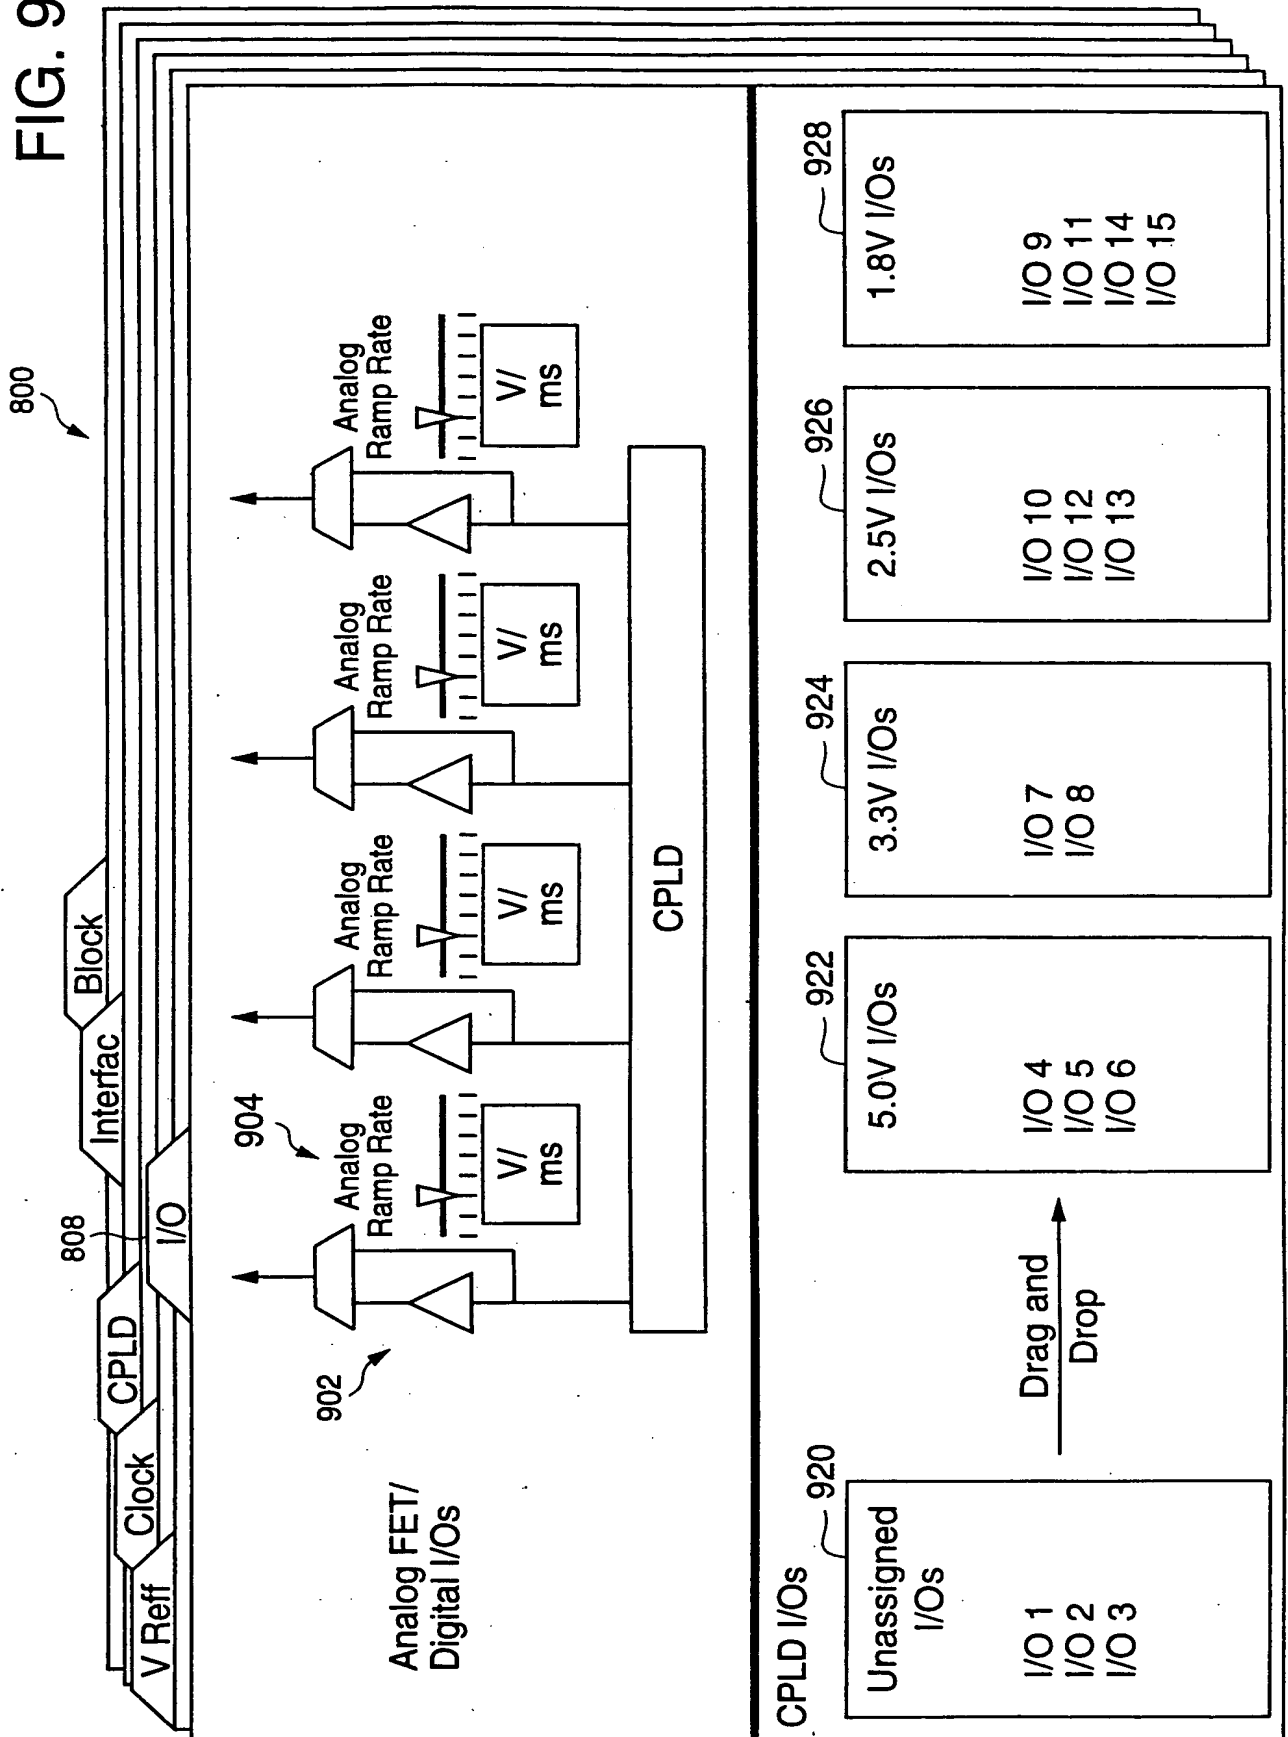


10/12

FIG. 10

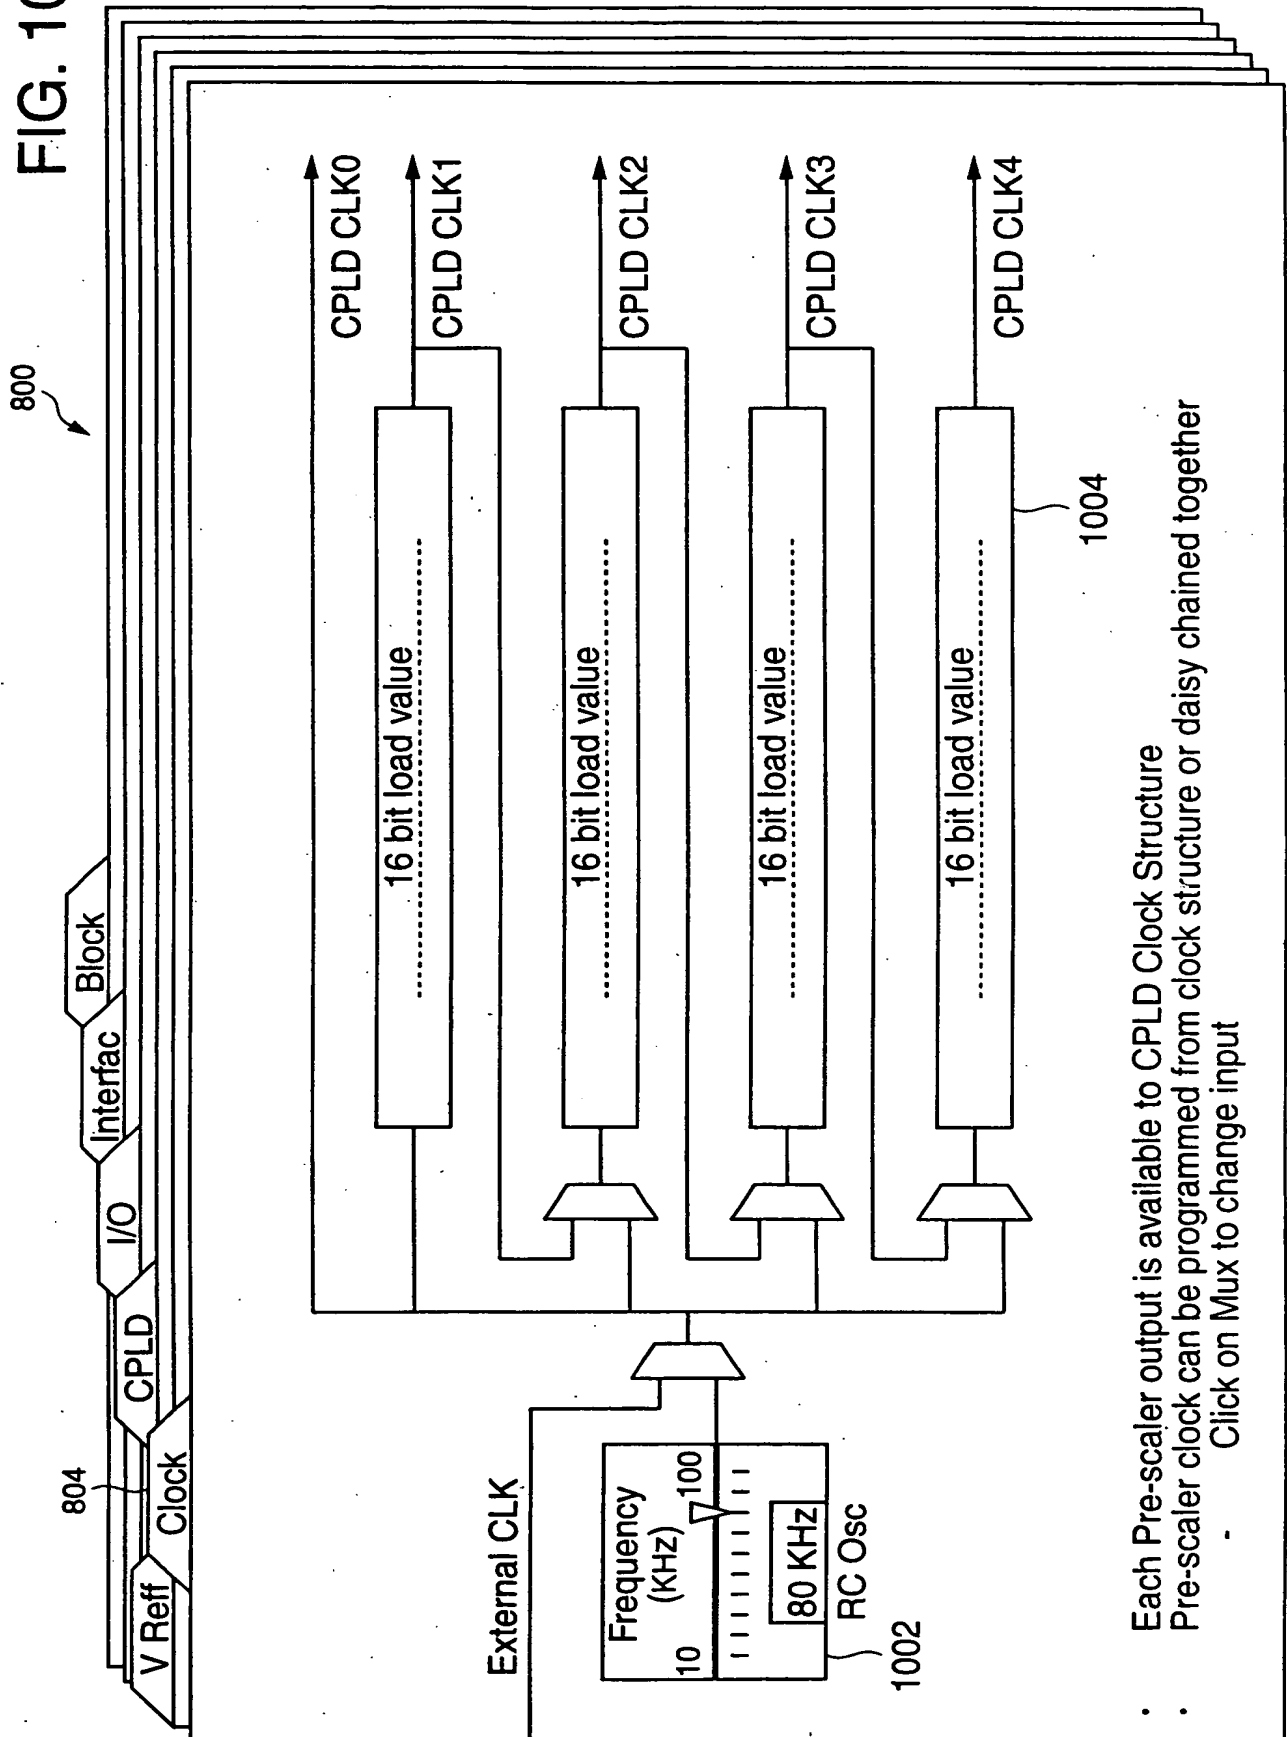

11/12

FIG. 11

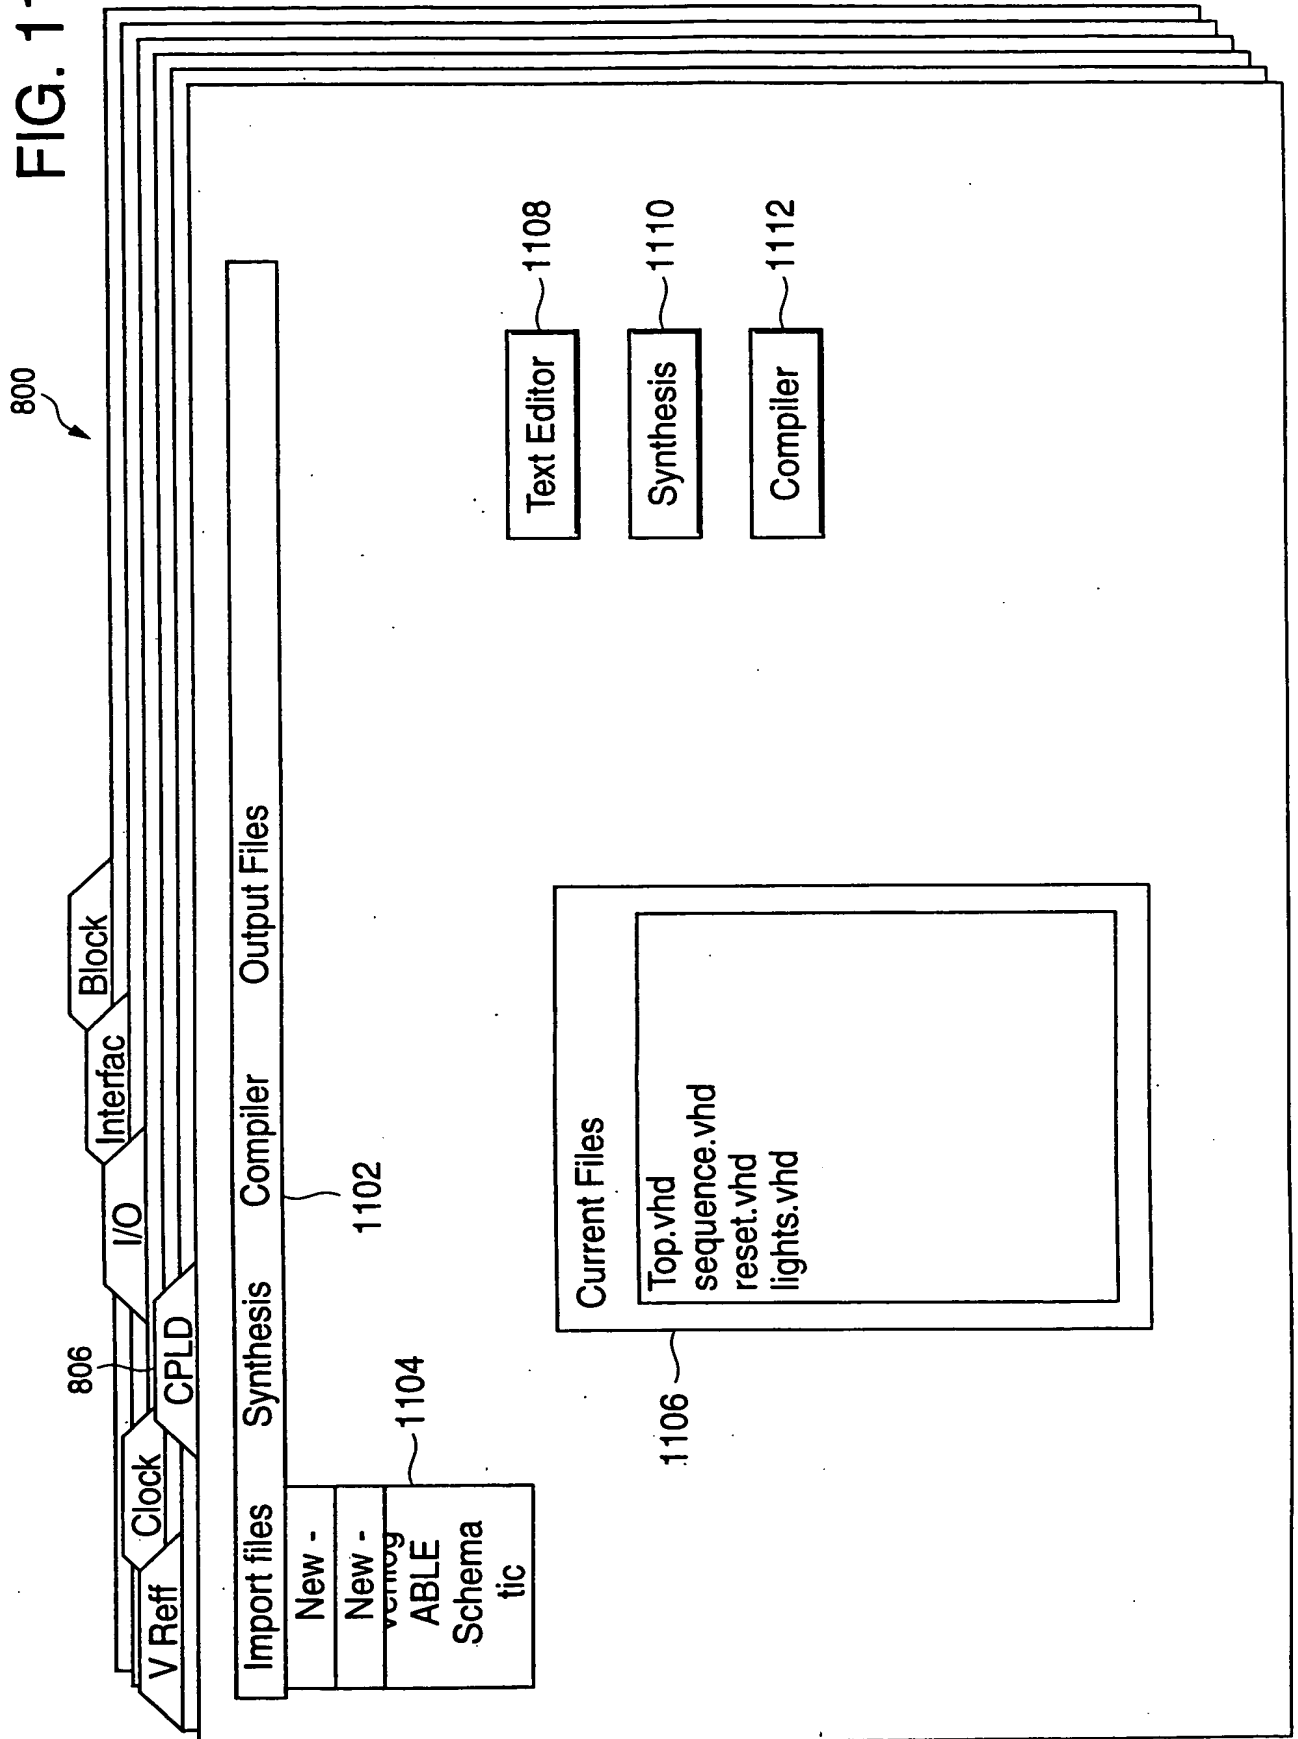

12/12

FIG. 12

800

	V Ref	Clock	CPLD	I/O	Block
	810				
	Interfac				
1202	UES 1011101010001111101011111010111101011110101001011				
1204	<input type="radio"/> Binary <input type="radio"/> Hex <input type="radio"/> Alpha				
1206	Programming Interface <input checked="" type="radio"/> JTAG <input type="radio"/> SPI <input type="radio"/> I2C <input type="radio"/> Microwire				
	1K EE TAG File <input type="text" value="Merrimac_tag.txt"/> <input type="button" value="Browse"/>				